

FS-400P Series – Low Cost Units for Plastic Piping

Flow Rate Settings: 0.5 GPM or 2.0 GPM

Port Size: 3/4" or 1" IPS

Primary Construction Material: Clear PVC

Setting Type: Fixed

Designed for low cost flow/no-flow monitoring. This series is available with a clear transparent PVC housing which is ideal for use where visual flow confirmation is desirable. These corrosion-resistant switches offer broad chemical compatibility. With only one moving part, their rugged construction offers long life with minimum maintenance. Ideal for water heating or purification, equipment cooling and general chemical processing use.

Specifications

Materials	
Housing, Shuttle and Bonnet	PVC
O-Ring	Buna N
Other Wetted Parts	Epoxy
Operating Pressure, Maximum	
	120 PSIG (8.3 bar) @ +70°F to +100°F @ +21°C to +37.8°C
	50 PSIG (3.4 bar) @ +101°F to +120°F @ +38.3°C to +48.9°C
Operating Temperature, Maximum	
Clear Version	+120°F (+48.9°C)
Set Point Accuracy	± 20%
Set Point Differential	20% Maximum
Switch*	SPST, 20 VA N.O. @ No Flow
Inlet/Outlet Ports	3/4" or 1" IPS and 1/2" NPT
Mounting Attitude	Vertical, Inlet Down
Electric Termination	No. 22 AWG, 24" L., PVC Lead Wires

*See "Electrical Data" on Page X-5 for more information.

How To Order – Standard Models

Specify Part Number based on material and port size.

PVC Material	Port Size	Actuation on Increasing Flow	Part Numbers
Clear	1/2" NPT*	0.5 GPM ±20%	135805 ⚡
	3/4" IPS	0.5 GPM ±20%	135810 ⚡
	1" IPS	2.0 GPM ±20%	135815 ⚡

*3/4" IPS model with 1/2" NPT port adapter installed.

Notes:


- Care should be taken by specifiers to ensure fluid compatibility with the above listed wetted materials.
- Use of 150 micron filtration is recommended.

⚡ – Stock Items.

 **feedwater**
the water treatment specialists
Tarran Way West, Tarran Estate,
Moreton, Wirral, CH46 4TU
Tel: + 44 (0)151 606 0808 Email: info@feedwater.co.uk
Fax +44 (0)151 678 5459 Web: www.feedwater.co.uk




U.L. Recognized —
File No. E31926
CSA Listed —
File No. LR30200

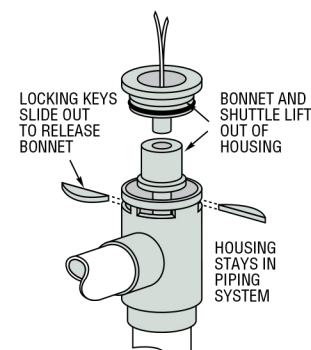

Cleanout is quick and easy. Two locking keys slide out to allow removal of a one-piece bonnet and shuttle assembly. Housing and piping are left undisturbed.

Dimensions

3/4" IPS Size (Both Ports)




1" IPS Size (Both Ports)


(All other dimensions are the same as 3/4" size)



1/2" NPT



Pressure Drop - Typical

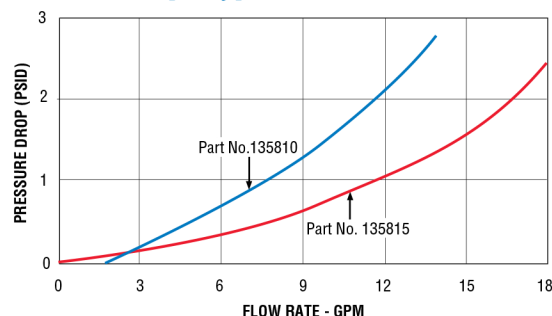

Tests conducted with units in vertical position (lead wires up) with water at +70°F (21°C).